

Specification


nano

DVR Camera Inputs	4 camera inputs.
DVR Monitor Outputs	Twin VGA/DVI Outputs, CCTV monitor switching output.
Display Speed	120 fps (NTSC) / 100fps (PAL).
Recording Speed	120 fps (NTSC / 100 fps (PAL) (Real-Time Every Camera).
Recording Resolution	320x240, 640x240, 640x480 (NTSC) / 352x288, 720x288, 702x576 (PAL).
Compression Method	MPEG4 True Hardware Compression. (No Main CPU Usage)
Resolution	Full Screen - 800 x 600, 640 x 480, 640 x 240, 320 x 240 and 160 x 120 pixels.
Screen Format	1, 4 divisions.
Recording Structure	Specified image database and AVI.
Security Function	Constructing for multi-layered security system: 1. Self-oriented database structure (accessing impossible). 2. Thumb Print protection (deciphering impossible). 3. Password protection with 3 different levels of password authority. 4. Windows block. 5. Covert camera function.
PTZ RS485/422/232	Support for over 50 major manufacturers' PTZ cameras.
Recording Method	Various types of recording modes: Normal, Instant, Motion, Watch, Alarm, Normal and Event.
Motion Detection	Full or partial motion detection. Customized zones can be selected for each camera.
Transmission	PSTN, ISDN, LAN, WAN, Integrated GSM/GPRS/3G Modem* support Internet - static and dynamic, TCP/IP port selectable.
Audio Recording	4 Individual Channels.
Alarm In/Out	4 inputs, 4 outputs - timed control.
Storage	250 Gigabyte Standard, dependant on system, up to 1 terabyte available, unlimited storage capability with storage arrays and drive pods.
Multitasking	Simultaneous live display, recording, playback, archive & remote transmission.
Searching Method	NEW! - Smart/Object Search & Thumbnail / Panorama search - IPS provides immediate image retrieval on one or all cameras.
Image Enhancement	Image enhancement functions include: 1. Up to 10X image enlargement for full frame playback 2. Zoom in/out, sharpness, B/W, hue, saturation, contrast, and brightness.
Remote View	Multi-Client connect, web browser, PDA & Mobile Phone.
Back-up Function	Auto or manual backup feature (DVD, CDR-W and Network).
OSD Function	Camera ID, location, status, and mode display.
Media Backup	DVDR-W / CDR-W / NEW! SmartMedia / Memory Stick® / Secure Digital / MultimediaCard / PCMCIA Firewire / 2 x USB2 / Mini USB, all built in to front panel as standard.
Dimensions W x H x D	91mm x 357mm x 275mm.
Software Package	Software package includes: DVR Server, 36 Site Monitoring Client (Up to ten simultaneous users), Mobile PDA/Phone Client
Warranty	1 year parts and labor on DVR, 3 years parts and labor on hard disk (Return to base) *3 Year Extended warranties available on request.

The official and latest technical information about i-VID new products are downloadable via iVID website: www.ivid.co.uk

Many third party PTZ Protocols are supported via RS232/422/485.

iVID are continuously in research and development and therefore reserves the right to alter specifications and prices without notice. For precise information, please contact your iVID representative. Subject to change in design and specifications. Subject to error.

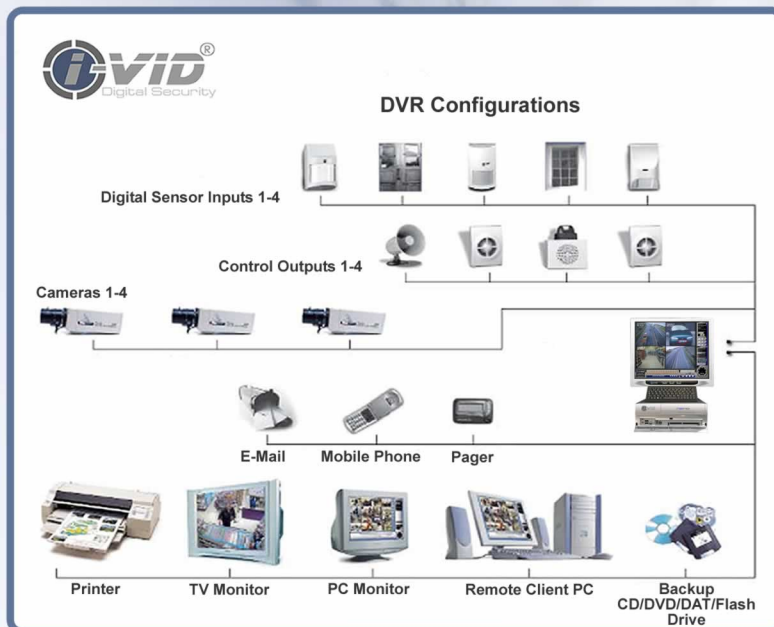

Imaging House
 Unit 23 St Asaph Business Park
 St Asaph
 Denbighshire
 LL17 0LJ

Tel: 0870 446 0233
 Fax: 0870 762 1593
 Email: sales@ivid.co.uk

www.ivid.co.uk

GO DIGITAL NOW!

Authorised Partner: